

OR-2208E/2215E (13200x8/15)



Industrial Rubber Roll Dye Sublimation Printer



Sublimation Ink
C M Y K

* 8pcs 13200 Print Heads Speed

360x1200dpi - 1pass	380 m ² /h
360x2400dpi - 2pass	190 m ² /h
360x3600dpi - 3pass	130 m ² /h

** 15pcs 13200 Print Heads Speed


360x1200dpi - 1pass	590 m ² /h
360x2400dpi - 2pass	290 m ² /h
360x3600dpi - 3pass	200 m ² /h

>> Technical Characteristics


- Original i3200 print head, more durable and stable;
- Felt roller to ensure smoother paper feeding;
- 8/15 pcs heads configuration, higher productivity;
- Professional color management software, more accurate output color;
- Bold structure brings more stable long-term printing;
- Fully sealed drying system and mute fans reduce noise a lot;
- State-of-art industrial design concept, strong body.

● Technical Specifications

Model	OR-2208E	OR-2215E
Print Head	8 I3200 Print Heads	15 I3200 Print Heads
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	≤ 2050 mm
	Media Weight	≤ 30g
	Maximum Media Load	≤ 3000m
Printing Width	≤ 2000 mm	
Ink Cartridges	Type	Super high / high density sublimation ink
	Capacity	5L Ink tank
	Color	4 colors (C/M/Y/K)
Printing Resolution	Maximum 3600 dpi	
Printing Speed	1pass(360x1200dpi): 380 sqm/h	1pass(360x1200dpi): 590 sqm/h
	2pass(360x2400dpi): 190 sqm/h	2pass(360x2400dpi): 290 sqm/h
	3pass(360x3600dpi): 130 sqm/h	3pass(360x3600dpi): 200 sqm/h
Media Heating System	Integrated post heater & Infrared Dryer & Fan system	
Rip	Riprint	
Interface	USB 3.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	Entirely machine size : 4050mm(L) x 2290mm(W) x 2009mm(H)	Entirely machine size : 4050mm(L) x 2290mm(W) x 2090mm(H)
	Printer size : 4050mm(L) x 1200mm(W) x 2090mm(H)	Printer size : 4050mm(L) x 970mm(W) x 2090mm(H)
	Media loading size : 2550mm(L) x 550mm(W) x 1250mm(H)	Media loading size : 2550mm(L) x 1050mm(W) x 1250mm(H)
Weight(with stand)	1.5T	
Packing Size	4120mm(L) x 1690mm(W) x 2180mm(H)	4120mm(L) x 2190mm(W) x 2180mm(H)
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15 °C to 32 °C] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5 °C to 40 °C] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, manual, drain bottle, ink cartridges, RIP software, etc.	

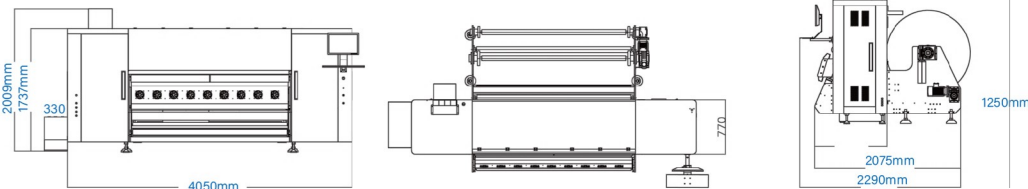


Advanced electrical board system. Standard 8/15 Epson I3200 print heads, has 3.5pl ink droplet and up to 3600dpi resolution. Industrial printer design extends long life of the print head.

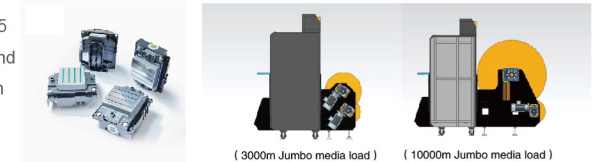


Rubber roll enables smooth paper feeding with high precision output and reduces pinch roller marks on paper and wrinkling issue




Air duct honeycomb platform could feed the paper stably, reducing the bulge of paper, improving the output quality and making the Calibration adjustment of platform easier



High stability imported magnetic encoder strip is more durable, improving the printing stability and ensuring a high-quality continuous output



Frequency motor ensures 70% faster speed (compared with the traditional motor), feeding paper more stably



Effectively solve the step deviation and speed variation which caused by different diameter materials during feeding, to ensure the materials are collected neatly



Bottom integrated heater makes the loading & take up easier, improving heating efficiency, more suitable for making samples for customer



2250mm machine width can printing on wider paper possible



The chuck drive works efficiently and stably, avoiding accuracy reduction and high maintenance rate caused by worn gear



Jumbo media roll maximum 3000m/10000m media load optional .